

Directional spool valve electrically operated type WE6

NS 6 | P_{max} 35 MPa | Q_{max} 80 dm³/min | WK 420 970




Euro
SERVICES

DATA SHEET - OPERATION MANUAL



APPLICATION

Directional spool valves type **WE6...** electrically operated are used to change direction of fluid flow in a hydraulic system which allows to change direction of movement of an actuator (usually a piston rod of a cylinder or a hydraulic motor) and to control functions: **start** and **stop**. These valves are used for subplate mounting in any position in a hydraulic system.

The product is compliant with the directive 2014/35/UE.

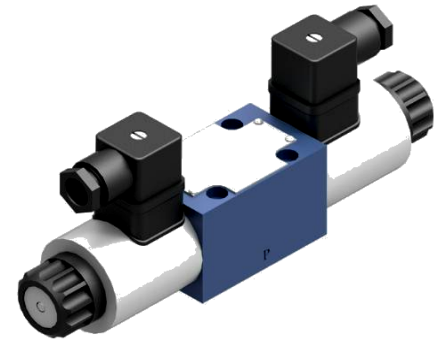

EXAMPLE OF APPLICATION in a hydraulic system

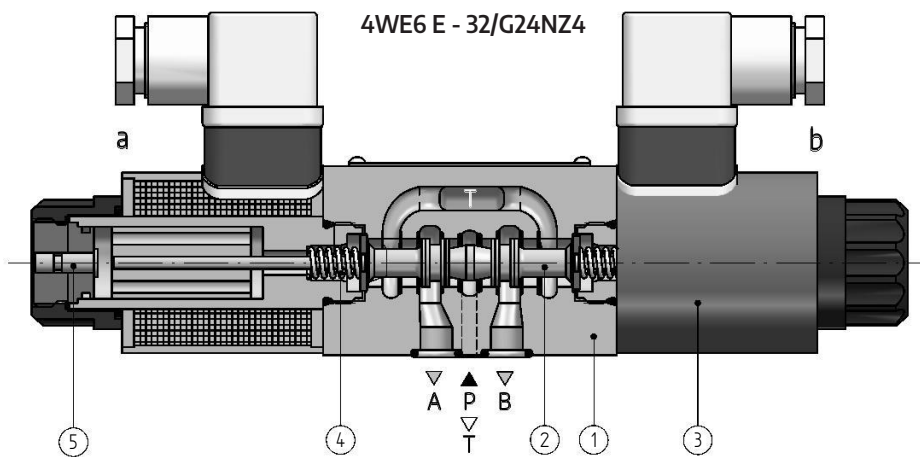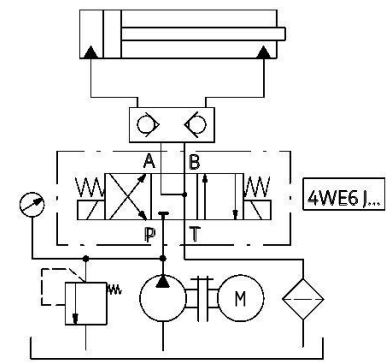

DESCRIPTION OF OPERATION

Main elements of directional spool valve type **WE6...** : housing 1, solenoids 3, spool 2, centering springs 4 and manual override 5. The valve is shifted when spool 2 is moved into one of end positions by the force of solenoid 3. The return of the spool into neutral (de-energized) position is caused by the centering springs 4. The shape of the spool affects connections configuration of ports: A, B, P and T.

Function of ports: **P** - supply port; **T** - oil return to the tank; **A**, **B** - ports for an actuator (a cylinder or a hydraulic motor). In case of emergency, the spool can be shifted manually by the override 5 - only for version with manual override option. Directional spool valve should be mounted in easily accessible way.

TECHNICAL DATA


hydraulic fluid cleanliness class	mineral oil ISO 4406 class 20/18/15
nominal fluid viscosity	37 mm ² /s at temperature 55°C
viscosity range	2,8 ÷ 380 mm ² /s
fluid temperature range (in the tank)	recommended: 40 ÷ 55 °C; max.: -20 ÷ 70 °C
ambient temperature range	-20 ÷ 50 °C
maximum operating pressure	35 MPa (ports P, A, B); 21 MPa (port T)
weight	with 1 solenoid WE6... 1,5 kg
	WE6...H... 2,7 kg
	with 2 solenoids WE6... 2,1 kg
	WE6...H... 3,3 kg
Flow cross-section (spool position O)	spool W: 3% of nominal cross-section

supply voltage of solenoids	DC 12V;24V;110V	AC-plug with rectifier 230V-50Hz;110V-50Hz	AC-direct power supply230V-50Hz
supply voltage tolerance	± 10%		
power consumption (DC)	30 W		-
holding power (AC)	-		50 VA
switch-on power (AC)	-		300 VA
max. switching frequency	15 000/h		12 000/h
switching time*	ON	5% of pressure change 30 ÷ 60 ms	
		95% of pressure change 30 ÷ 70 ms	
	OFF	5% of pressure change 15 ÷ 50 ms	
		5% of pressure change 30 ÷ 60 ms	
protection class	IP 65		
solenoid coil temperature	max. 150 °C		


* switching time according to ISO 6403 with a directional control valve in horizontal position

assembly and operation requirements at www.operating-conditions.ponar.pl


SPOOL CENTERING VERSIONS OF... and O...



Version **WE6.../OF...** - 2-position directional spool valve without spring return, with detent. The spool **2** is positioned and fixed with detent **6** and shift is caused by providing voltage impulse to the solenoid.



Version **WE6.../O...** - 2-position directional spool valve without spring return. The spool is positioned and fixed with activated solenoid. The valve has no defined natural position in the de-energized condition.




VERSION WITH THROTTLE INSERT


Version **WE6.../...B...** - directional spool valve has throttle insert **7** in port **P**.

ADDITIONAL EQUIPMENT (OPTIONAL)


manual control lever	WE6.../...H...
manual control lever with a lock	WE6.../...HF...
inductive position switch type S	WE6.../... - S
inductive position switch type M	WE6.../... - M




WE6.../...H



WE6.../...HF



WE6.../... - S




WE6.../... - M

CHARACTERISTIC CURVES

flow resistance characteristic curves (measured at viscosity $\nu = 41 \text{ mm}^2/\text{s}$ and temperature $t = 50 \text{ }^\circ\text{C}$)

characteristic curves Δp (Q) for directional spool valve type **WE6...** for various spool types


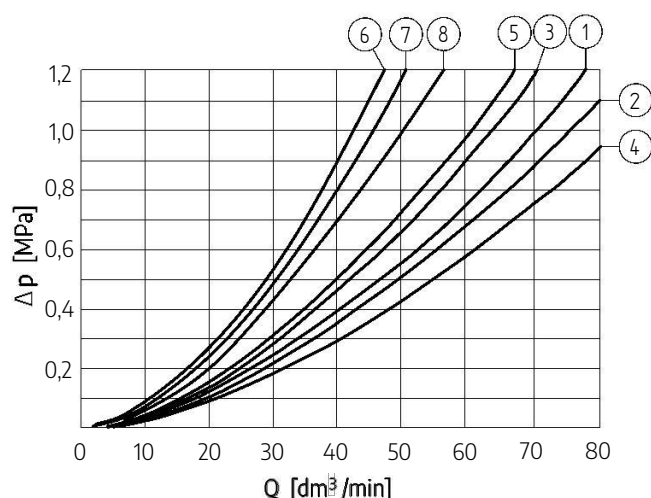


spool symbol	characteristic curve			
working positions see pages 4; 5	direction of flow			
	P → A	P → B	A → T	B → T
A; B	3	3	-	-
C	1	1	3	1
D; Y	5	5	3	3
E	3	3	1	1
F	2	3	3	5
G	7	7	6	6
H	2	4	2	2
J	1	1	2	1
L; W	1	1	2	2
M	2	4	3	3
P	2	3	3	5
U	3	1	3	3
D1	5	-	-	5
Y1	-	5	5	-
central position see pages 4; 5	direction of flow			
	P → A P → B	P → T	A → T B → T	B → A
G	-	8	-	-

PERFORMANCE CURVES



Performance limits

characteristic curves **P-Q** for directional spool valve **WE6...** with **DC solenoids** for various spool types

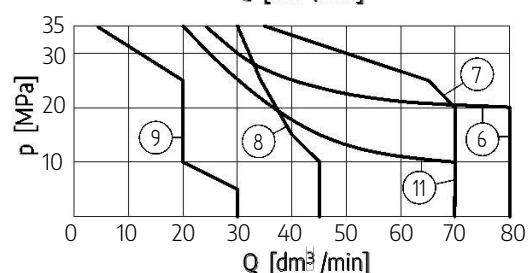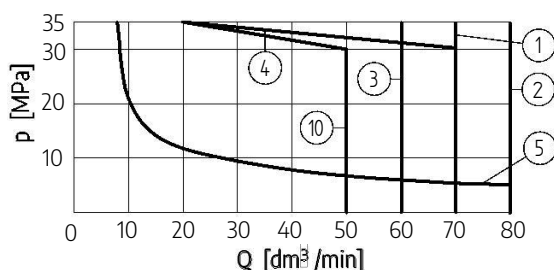

spool symbol (see pages 4; 5)	characteristic curve
E; EA/O; EB/O; MA/O; MB/O; EA/OF; EB/OF; MA/OF; MB/OF	1
H; M; L; U; JA/O; JB/O; C/OF; D/OF; JA/OF; JB/OF; HA/OF; HB/OF	2
C/O; D/O	3
C; D; Y	4
A; B	5
A/O	6
J	7
G	8
F; P	9
D1; Y1	10
GA/O; GB/O; GA/OF; GB/OF	11

characteristic curves **p-Q** for directional spool valve type **WE6...**
with **AC solenoids with direct supply** for various spool types



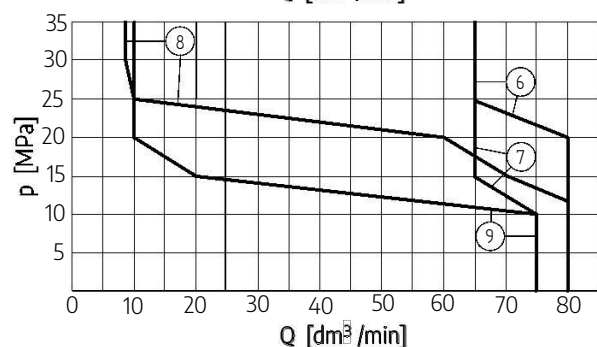
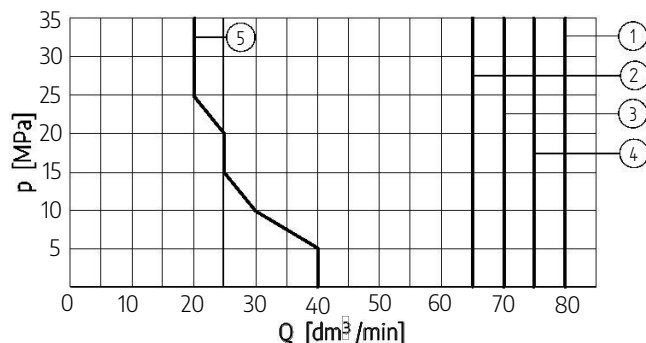


spool symbol (see pages 4; 5)	characteristic curve
C; D; H; D/O; HA/O; HB/O; EA/O; EB/O; JA/O; JB/O; D/OF; HA/OF; HB/OF; EA/OF; EB/OF; JA/OF; JB/OF; C/OF	1
W	2
E; MA/O; MB/O; MA/OF; MB/OF	3
L	4
G	5
J	6
M	7
A	8
GA/O; GB/O; GA/OF; GB/OF	9

NOTES:








The above operating limits are related to symmetrical flow through all ports i.e. if the oil flows from **P** to **A**, then the same flow rate is from **B** to **T** (for directional control valves with 4 service ports). Asymmetry in flow affects the parameters negatively.

symbols for 3-position directional spool valves









symbols for 2-position directional spool valves

versions with positions a, 0














versions with positions 0, b



DIAGRAMS OF SPOOLS

positions: working and interim

working



E

F

G

H

J

L

M

P








U

W**

= R

working and interim

working



EA

FA

GA

HA

JA

LA

MA

PA









UA

WA**

= R

working and interim

working



EB

FB

GB

HB

JB

LB

MB

PB

UB

WB**

= R


(*) - versions available only with spools: EA, GA, HA, JA, MA, EB, GB, HB, JB, MB

(**) - flow cross-section for spool W (position O) - 3% of nominal flow

SYMBOLS

symbols for 2-position directional spool valves

versions with positions **a, b**

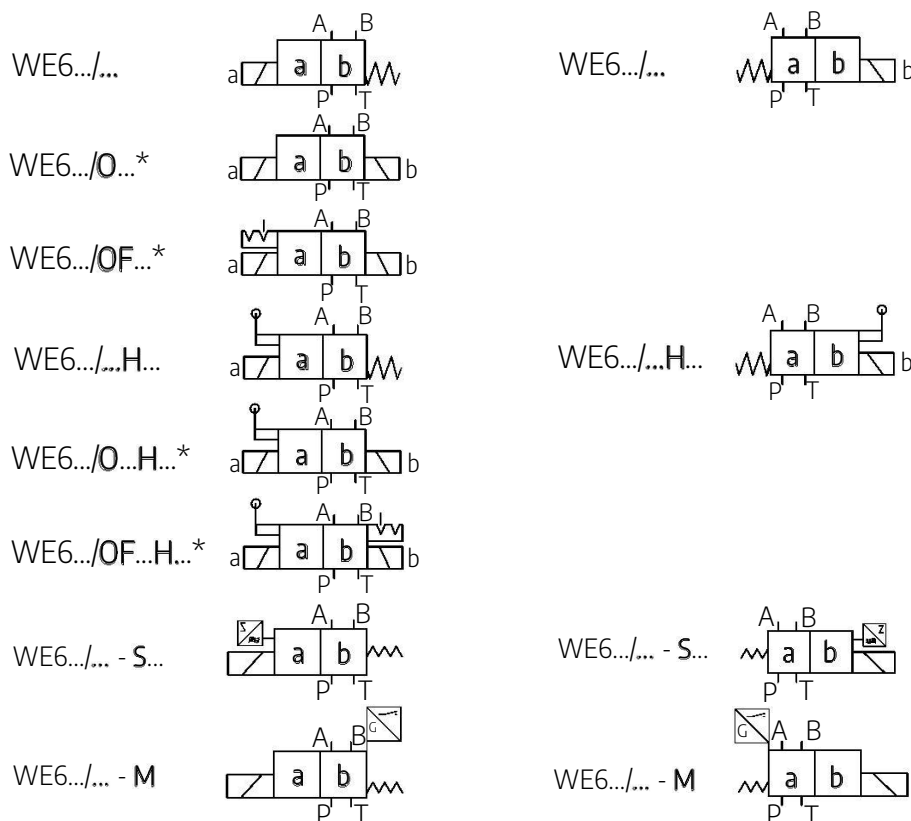

NOTE: * - versions available only with spools: **A, C, D**


DIAGRAMS OF SPOOLS

positions: working and interim

working


working and interim

working

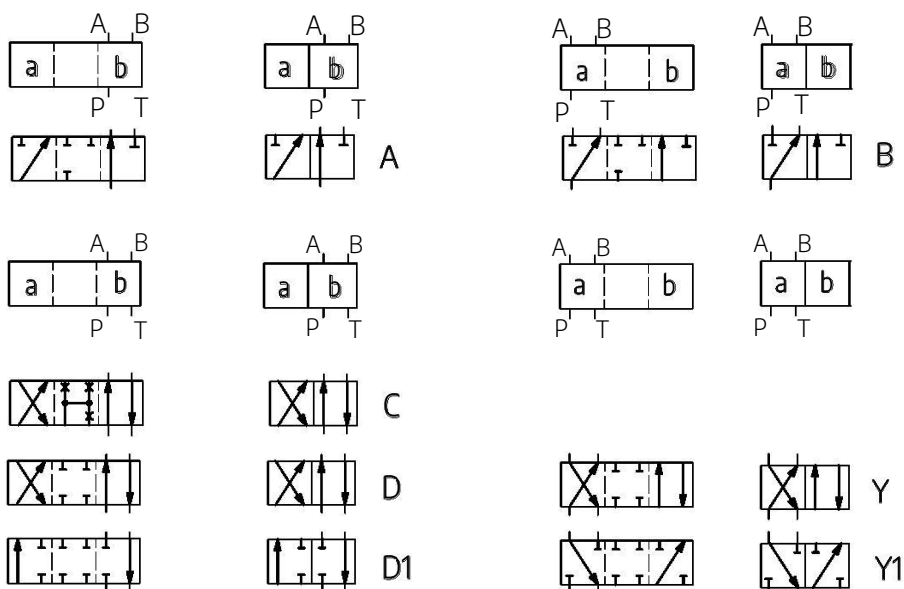

OVERALL AND CONNECTION DIMENSIONS

version **WE6.../... Z4...** (electrical connection **ISO 4400** type)

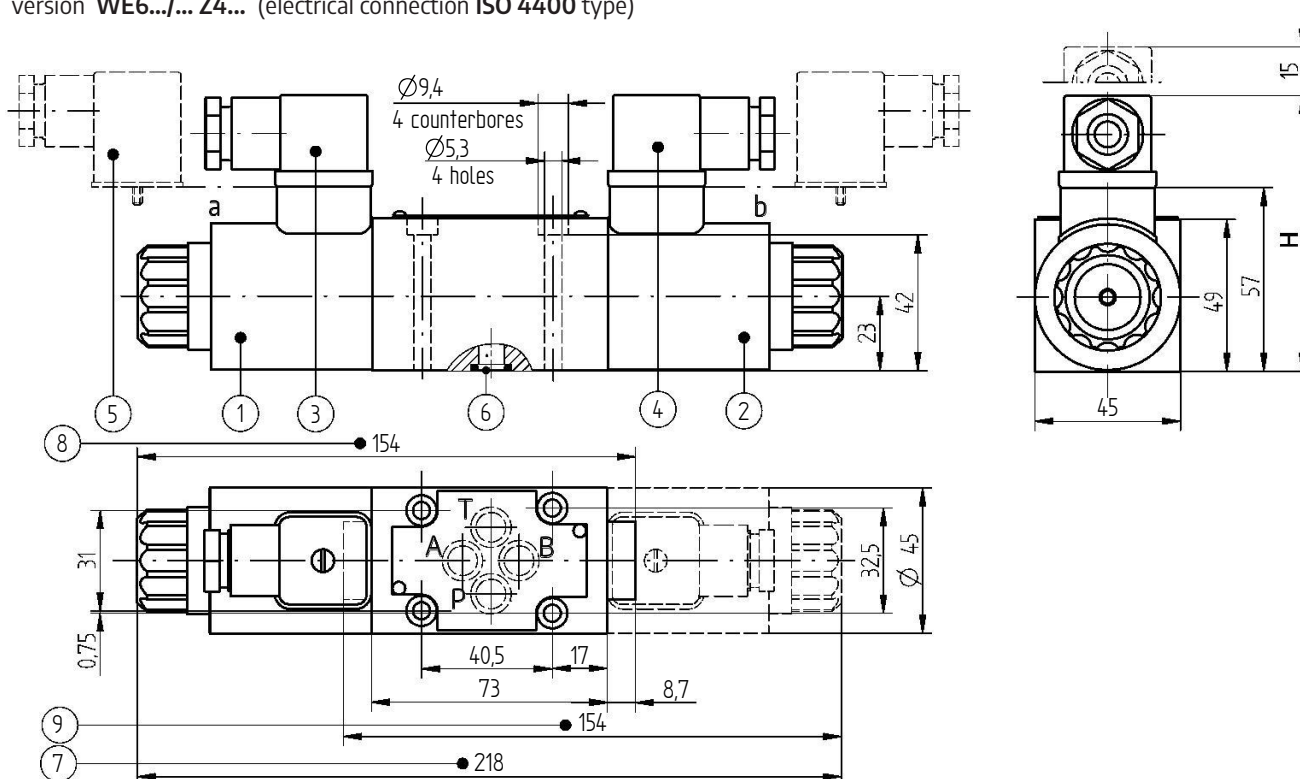


electrical connection option ...Z4... (ISO 4400)

connector type	supply voltage	Dimension H
ISO 4400 (DIN 43650 - A)	DC: 12V; 24V; 110V	86
ISO 4400 (DIN 43650 - A) with rectifier	AC: 110V; 220V; 230V	93

NOTES:


- versions of WE6... **DC** solenoids with other connectors, see page 7
- versions of WE6... **AC** solenoids with direct power supply, see page 8

- solenoid on **a** side
- solenoid on **b** side
- connector on **a** side - **ISO 4400** type (**DIN 43650 - A**)
- connector on **b** side - **ISO 4400** type (**DIN 43650 - A**)
- connector - **ISO 4400** type (**DIN 43650 - A**) with rectifier
- O-ring **9,25 × 1,78** - pcs. 4 /set (**P, T, A, B**)
- directional spool valve dimension with **2** solenoids on side - **a, b**
 - 3-position with spring return (spool diagrams: **E, F, G, H, J, L, M, P, U, W** - see page 4)
 - 2-position without spring return
 - 2-position without spring return and with detent (versions **WE6.../O...; .../OF...;** spools: **A, C, D, EA, GA, HA, JA, MA, EB, GB, HB, JB, MB** - see pages 4, 5)
- directional spool valve dimension with **1** solenoid on **a** side
2-position with spring return (spools: **A, C, D, D1, EA, FA, GA, HA, JA, LA, MA, PA, UA, WA** - see pages 4, 5)
- directional spool valve dimension with **1** solenoid on **b** side
2-position with spring return (spools: **B, Y, Y1, EB, FB, GB, HB, JB, LB, MB, PB, UB, WB** - see pages 4, 5)
- porting pattern of subplate surface compliant with **ISO 4401** designation **ISO 4401-03-02-0-94 (CETOP 03)**
mounting screws **M5 × 50 -10.9** in accordance with **PN-EN ISO 4762 (PN/M-82302)** - pcs. 4 /set
tightening torque **Md = 9 Nm**.
- required surface quality of the valve contact surface

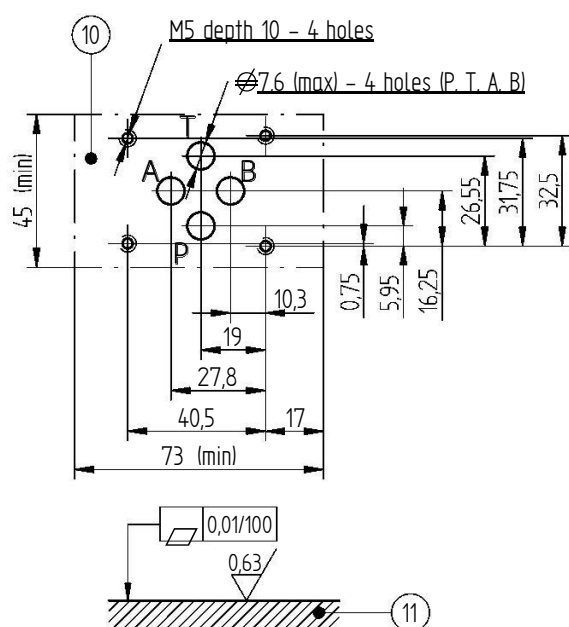

OVERALL AND CONNECTION DIMENSIONS

version **WE6.../...W230-50...Z4...** (AC solenoids; electrical connection **ISO 4400** type)

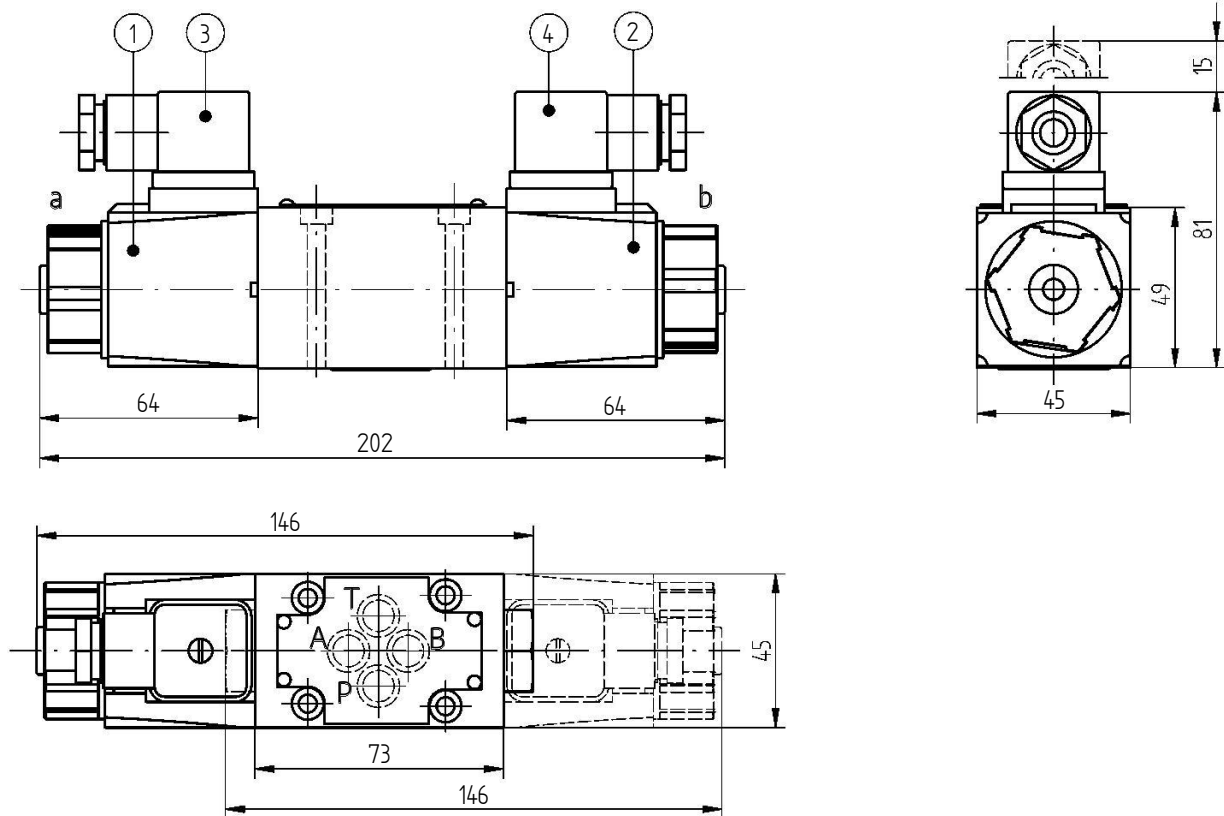

1. AC solenoid (with direct power supply) on **a** side
2. AC solenoid (with direct power supply) on **b** side
3. connector on **a** side - **ISO 4400** type (DIN 43650 - A)
4. connector on **b** side - **ISO 4400** type (DIN 43650 - A)

WARNING: Any simultaneous actuation of 2 solenoids of one valve must be ruled out (incomplete switch of solenoid is causing coil overheat and damage).

NOTE: Description of other elements of the valve drawing; porting pattern and required surface quality of the valve contact surface - as in version **WE6.../...Z4...** (see page 6)

HOW TO ORDER

	WE		6	—			/								—			
1		2			3	4		5	6	7	8	9	10	11		12	13	14

1 number of main ports

3 main ports (only for spools A, B) = 3
4 main ports (for the other spools) = 4

2 nominal size (NS)

NS6 = 6

3 spool symbol

spool symbols - see pages 4; 5

4 series number

series 32 = 32
series 30 ÷ 39 - connection and installation dimensions unchanged

5 spool positioning

with spring return = Ø
without spring return* = O
without spring return with detent* = OF

* options available only for spools: A, C, D, EA, GA, HA, JA, MA, EB, GB, HB, JB, MB)

6 supply voltage of solenoids

12V DC = G12
24V DC = G24
110V DC = G110
110V AC 50Hz
(connector with rectifier) = W110R
220V AC 50Hz
(connector with rectifier) = W220R
230V AC 50Hz
(connector with rectifier) = W230R
230V AC 50Hz
(direct power supply with AC current) = W230-50

7 manual override

solenoids with manual override = N
solenoids without manual override (only for version with inductive position switch M type) = Ø

8 manual lever control*

no lever = Ø
lever positioned vertically = H
lever positioned vertically with a lock = HF
lever positioned diagonally = HS
lever positioned diagonally with a lock = HSF

* Options with a manual lever control (...H...; ...HS...; ...HF...; ...HSF...) for versions: WE6...A/O...; ...A/OF...; ...B/O...; ...B/OF... with spools: EA, GA, HA, JA, MA, EB, GB, HB, JB, MB available after consultation with the Manufacturer

9 electrical connection type

connector ISO 4400 (DIN 43650-A) without LED = Z4
connector ISO 4400 (DIN 43650-A) with LED = Z4L
AMP Junior Timer (without mating connector; only for options G12; G24) = J
Deutsch (without mating connector; only for option G12; G24) = D

10 throttle insert (in port P)

without throttle insert = Ø
throttle insert Ø 0,8 = B 08
throttle insert Ø 1,0 = B 10
throttle insert Ø 1,2 = B 12

11 seal type

NBR (for fluids on mineral oil base) = Ø
FKM (for fluids on phosphate ester base) = V

12 spool position monitoring*

without position switch = Ø
spool position switch type S1 = S1
spool position switch type S2 = S2
spool position switch type M (only for 2-position versions with spring return) = M

* optional versions with a spool position switch and a manual lever control (options ...H...; ...HS...; ...HF...; ...HSF...) available after consultation with the Manufacturer

13 monitored spool position

without spool position monitoring = Ø
monitored position **0 - zero** = 0

* 3-position versions, 2-position versions with positions (a, 0) or (0, b)

monitored position **a** = A

* 2-position versions with positions (a, 0) or (a, b)

monitored position **b** = B

* 2-position versions with positions (a, b) or (0, b)

monitored positions **a** and **b** = AB

* 3-position versions

14 further requirements= *

(to be agreed upon with the Manufacturer)

Ø indicates that the box should be left blank.

The **symbols in bold** are the preferred versions available in short delivery time.

Coding example:: **4 WE6 E - 32/G24 N Z4 B08 - S1 AB**

SUBPLATES AND MOUNTING SCREWS

Subplates must be ordered according to data sheet **WK 496 480**:

- G341/01 - threaded connections G 1/4
- **G342/01** - threaded connections **G 3/8**
- G502/01 - threaded connections G 1/2

Sub plate sand screws for mounting directional spool valve **M5×50-10.9** in accordance with **PN-EN ISO 4762** - 4 pcs./set.
Tightening torque of the screws **Md = 9 Nm**.

The symbols **in bold** are the preferred versions available in short delivery time.

Subplates and mounting screws must be ordered separately.



Euro
SERVICES

CONTACT

EURO SERVICES GROUP
www.Euroservicesgroup.com
Info@euroservicesgroup.com

Manual operation lever for directional spool valve WE6 s. 32

Directional spool valve WE6... type is also available in versions with optional equipment:

- manual control lever - versions WE6.../...H...; WE6.../...HS...
- manual control lever with a lock - versions WE6.../...HF...; WE6.../...HSF...

DESCRIPTION OF OPERATION


After switching the valve by manual control lever (options ...H...; ...HS... without a lock), the lever returns to the initial (neutral) position automatically.

After switching the valve by solenoid, the manual control lever does not change its neutral position and is not active.


In order to switch the spool valve by using manual control lever (options ...HF...; ...HSF... with a lock), one should move the block sleeve up and change the angle of the lever. In order to keep the lever in the switched position, move the block sleeve down to the stop.

After unlocking, the lever returns automatically to the initial (neutral) position.


During switching the valve by solenoid, the lever should be in the middle (neutral) position, where it is not active and does not block the position of the spool.




WE6.../...H...




WE6.../...HS...



WE6.../...HF...



WE6.../...HSF...





OVERALL AND CONNECTION DIMENSIONS

3-position versions: **WE6.../...H Z4...; .../...HS Z4...**

2-position versions: **WE6.../O...H Z4...; .../OF... H Z4...**

WE6.../O...HS Z4...; .../OF...HS Z4...

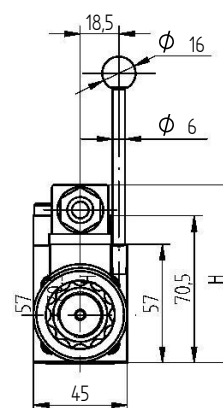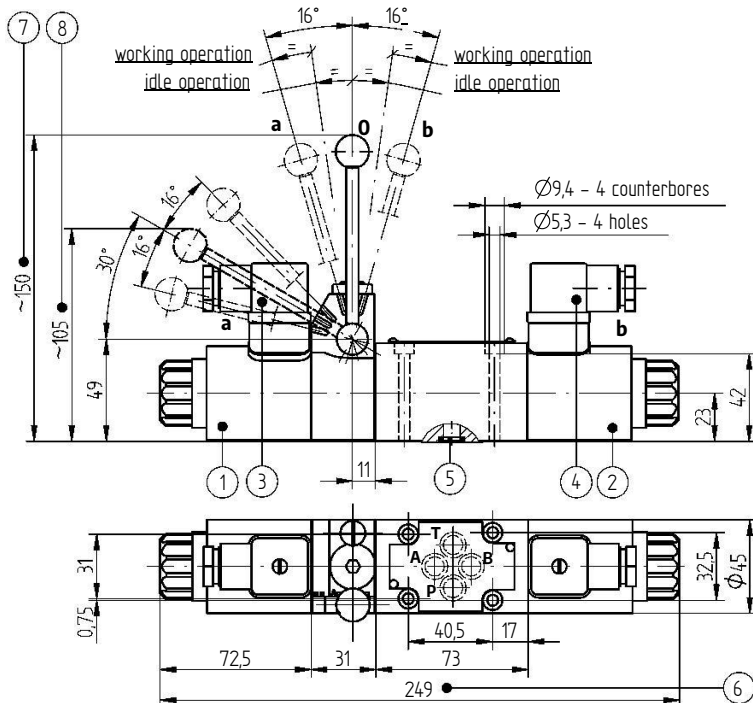

option of electrical connection ...Z4... (ISO 4400)



connector type	supply voltage	dimension H
ISO 4400 (DIN 43650-A)	DC: 12V; 24V; 110V	86
ISO 4400 (DIN 43650-A) with rectifier	AC: 110V; 220V; 230V	93

NOTES:


versions **WE6.../...H...; .../O...H...; .../OF...H...;**
WE6.../...HS...; .../O...HS...; .../OF...HS...;
 with other electrical connectors, see page 15

1. solenoid on **a** side
2. solenoid on **b** side
3. connector on **a** side - **ISO 4400** type (DIN 43650 - A)
4. connector on **b** side - **ISO 4400** type (DIN 43650 - A)
5. O-ring **9,25 × 1,78** - 4 pcs./set (**P, T, A, B**)
6. dimension of directional spool valve with **2 solenoids - a, b**
 - 3-position with spring return;
versions **WE6.../...H...; .../HS...**
 - 2-position without spring return;
versions **WE6.../O...H...; .../O...HS...**
 - 2-position without spring return and with detent;
versions **WE6.../OF...H...; .../OF...HS...;**
7. dimension of the spool valve in version **WE6.../...H...**
8. dimension of the spool valve in version **WE6.../...HS...**
9. dimensions of a spool valve with **1 solenoid - a or b**
2-position, with spring return

2-position versions: **WE6.../...H Z4...; .../...HS Z4...**

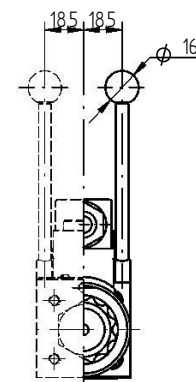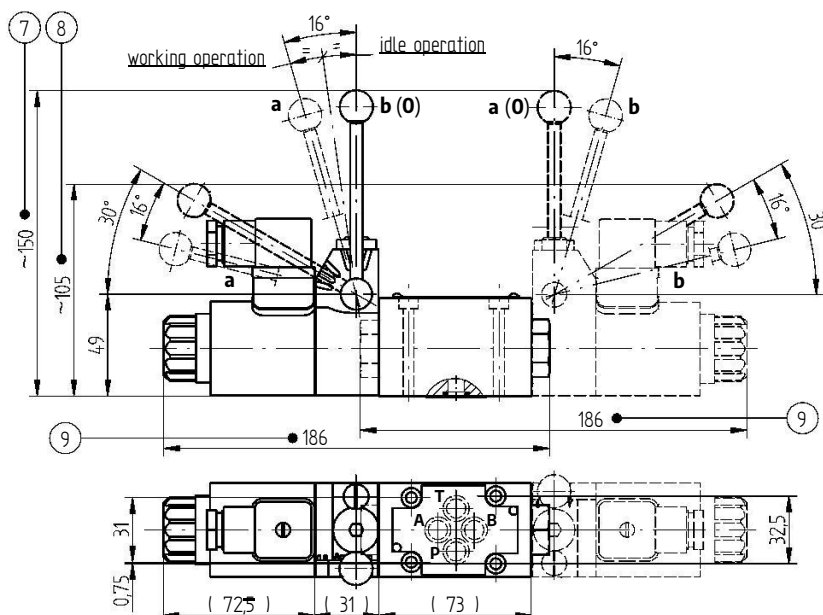


3-position versions: **WE6.../...HF Z4...**

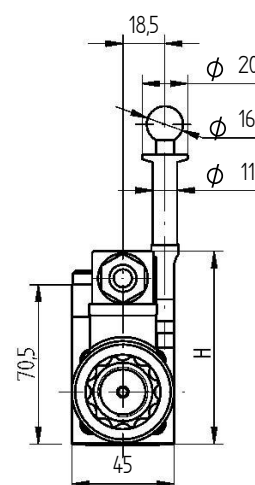

1. solenoid on **a** side
2. solenoid on **b** side
3. connector on **a** side - **ISO 4400** type (DIN 43650 - A)
4. connector on **b** side - **ISO 4400** type (DIN 43650 - A)
5. O-ring **9,25×1,78** - 4 pcs./set (**P, T, A, B**)
6. dimension of directional spool valve with 2 solenoids - **a, b**
3-position with spring return
WE6.../...HF...; ...HSF...
7. manual control lever
8. manual control lever lock sleeve

3-position versions: **WE6.../...HSF Z4...**

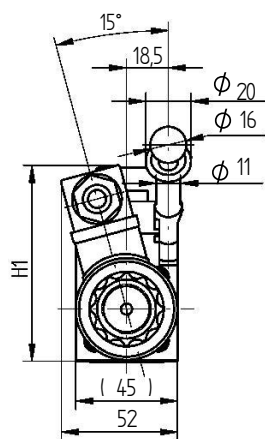


connector type	supply voltage	dimension	
		H	H1
ISO 4400 (DIN 43650-A)	DC: 12V; 24V; 110V	86	87
ISO 4400 (DIN 43650-A) with rectifier	AC: 110V; 220V; 230V	93	94

versions **WE6.../...HF...**; **WE6.../...HSF...**
with other electrical connectors, see page 15

OVERALL AND CONNECTION DIMENSIONS


2-position versions: **WE6...A/...HF Z4...; ...B/...HF Z4...**

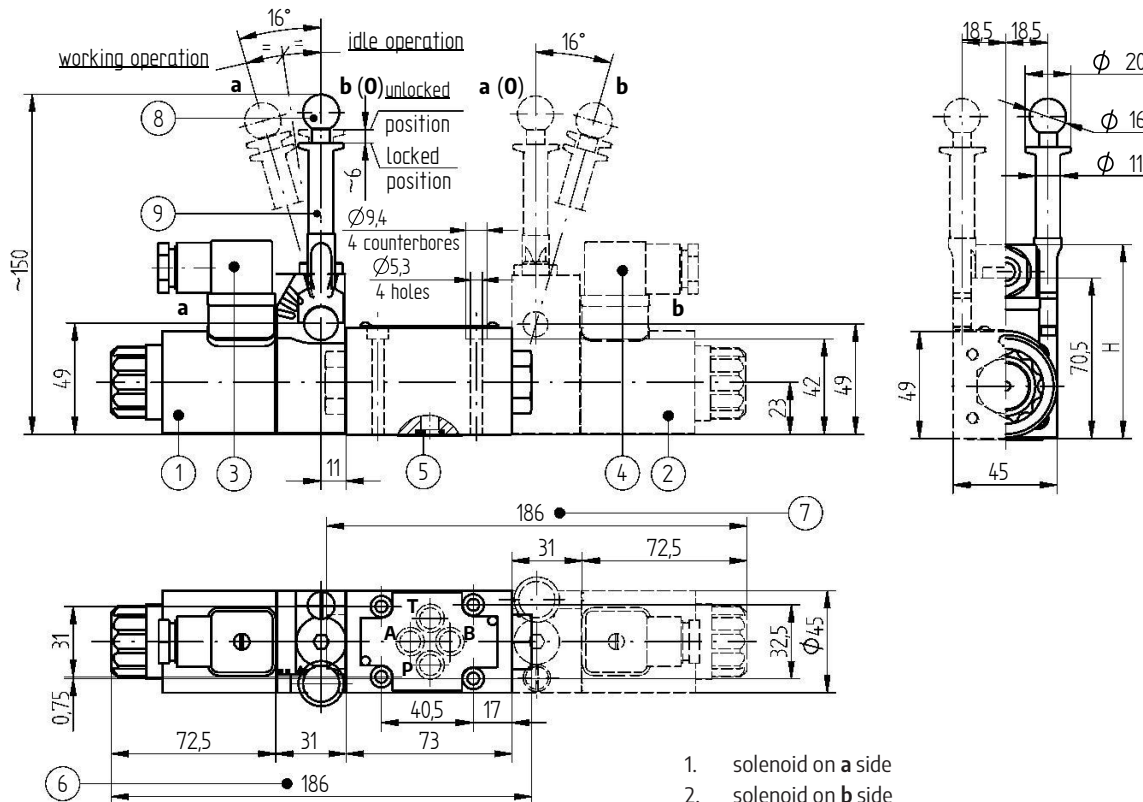

option of electrical connection ...Z4... (ISO 4400)

connector type	supply voltage	dimension	
		H	H1
ISO 4400 (DIN 43650-A)	DC: 12V; 24V; 110V	86	87
ISO 4400 (DIN 43650-A) with rectifier	AC: 110V; 220V; 230V	93	94

2-position versions: **WE6...A/...HSF Z4...; ...B/...HSF Z4...**

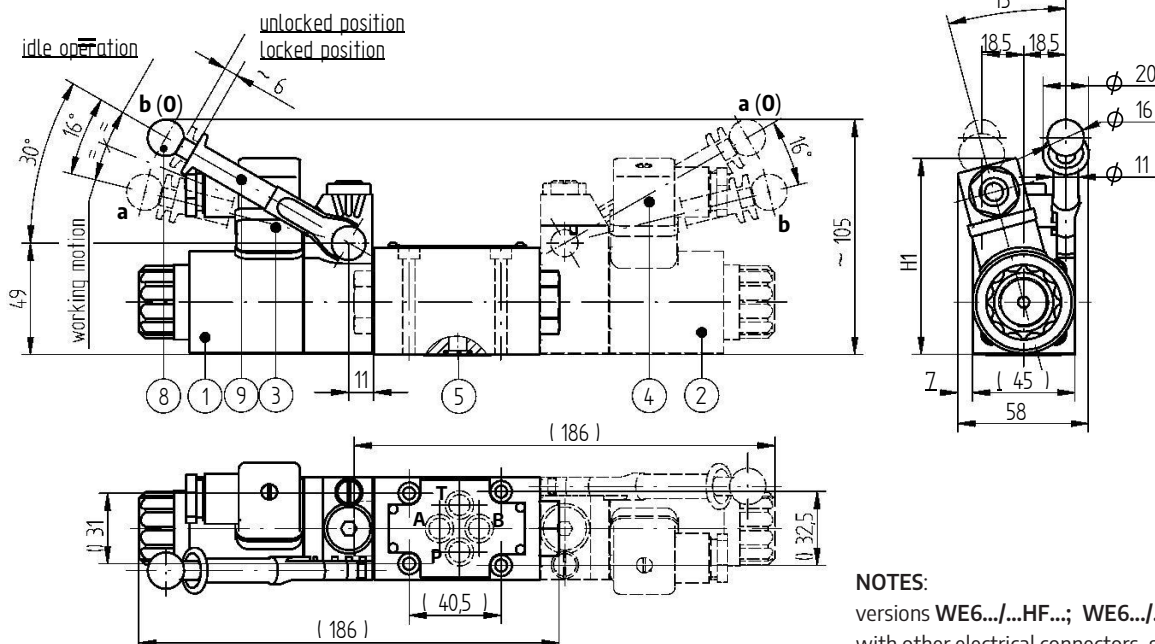


NOTES:

versions WE6.../...HF...; WE6.../...HSF...
with other electrical connectors, see page 15

OVERALL AND CONNECTION DIMENSIONS

version WE6.../... G12...J...; ...G24...J... (electrical connection **AMP Junior Timer** type)

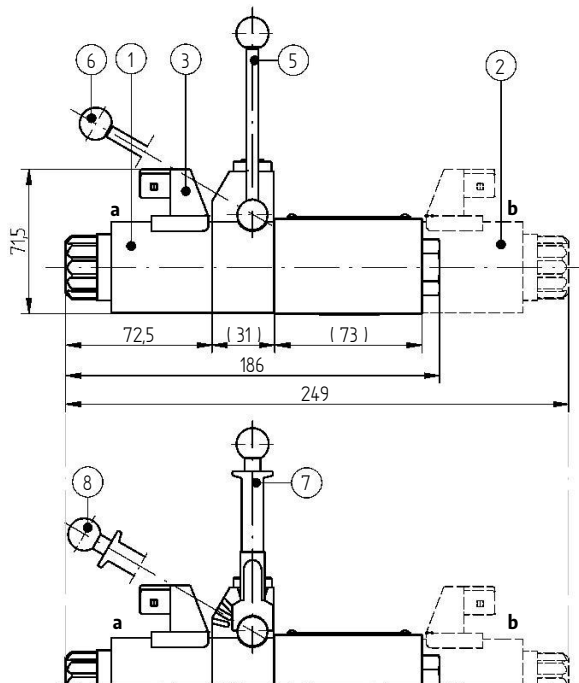


1. solenoid on a side
2. solenoid on b side
3. 2-poles male **AMP Junior Timer** connector

(connectors not shown in the drawing **must be ordered separately** - Data Sheet **WK 499 963**)

5. versions: ...H...G12...J...; ...H...G24...J...
6. versions: ...HS...G12...J...; ...HS...G24...J...
7. versions: ...HF...G12...J...; ...HF...G24...J...
8. versions: ...HSF...G12...J...; ...HSF...G24...J...

version WE6.../... G12...D...; ...G24...D... (electrical connection **Deutsch** type)

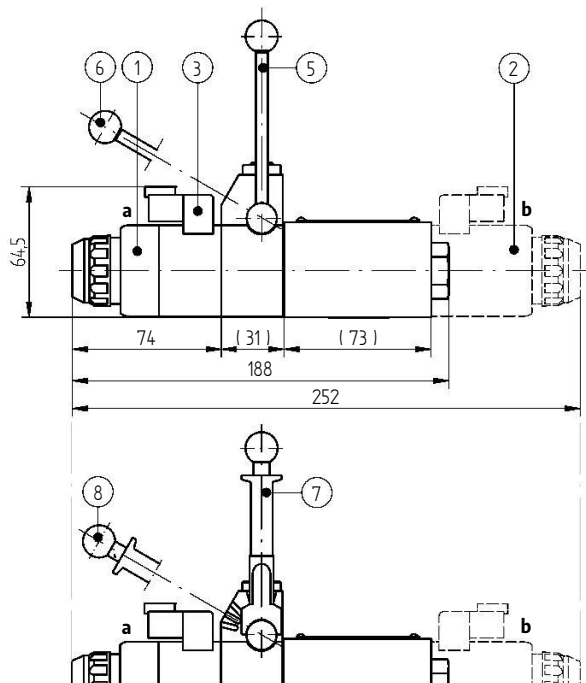

1. solenoid on a side
2. solenoid on b side
3. connector **Deutsch DT04 -2P**

(connectors **Deutsch DT04 -2S** type not shown in the drawing **must be ordered separately** - Data Sheet **WK 499 963**)

5. versions: ...H...G12...D...; ...H...G24...D...
6. versions: ...HS...G12...D...; ...HS...G24...D...
7. versions: ...HF...G12...D...; ...HF...G24...D...
8. versions: ...HSF...G12...D...; ...HSF...G24...D...

NOTES:

Description of other elements of the valve drawing; porting pattern and required surface quality of the valve contact surface- as in version **WE6.../...Z4...** (see page 6)



Euro
SERVICES


CONTACT

EURO SERVICES GROUP
www.Euroservicesgroup.com
Info@euroservicesgroup.com

Inductive spool position switch for directional spool valve WE6 s. 32


Directional spool valve WE6... type is also available in versions with optional equipment:

- S type inductive spool position switch - version WE6.../...-S...
- M type inductive spool position switch - version WE6.../...-M...

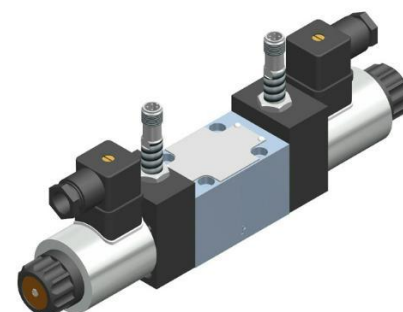

ADDITIONAL EQUIPMENT OF THE DIRECTIONAL SPOOL VALVE

S type Inductive spool position switch
version WE6.../...-S...

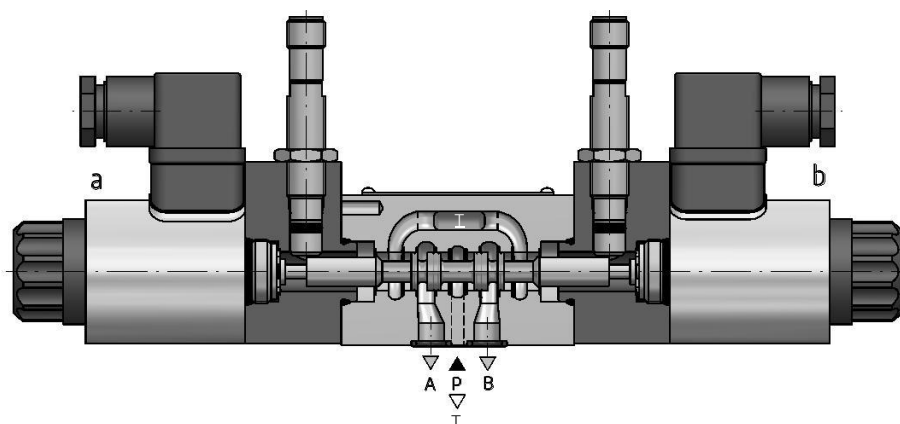


SUPPLEMENTARY TECHNICAL PARAMETERS

type of spool position switch	PNP inductive proximity switch	
supply voltage range of the switch	10 ÷ 30V DC	
max load current of the switch	100 mA	
switch connection type	M12x1 external thread; 4 pins	
protection class	IP 65	
weight of the directional spool valve	with 1 solenoid and 1 switch	2,1 kg
	with 2 solenoids and 1 switch	2,7 kg
	with 2 solenoids and 2 switches	3,3 kg

DIAGRAMS

Diagrams of S type inductive switch electrical connection

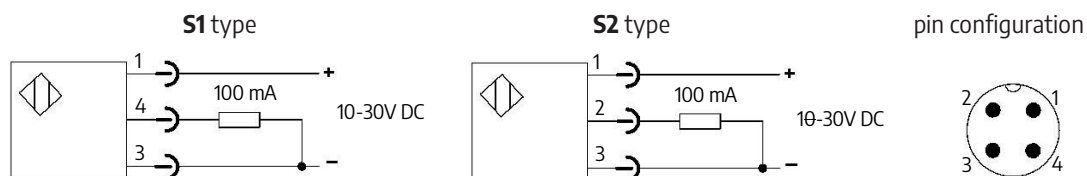

Symbols for directional spool valves and initial positions of switches



Initial position of S type inductive switch depending on the spool position

0 - voltage free state of output contact



1 - voltage state of output contact

symbol for
directional valve

3-position version

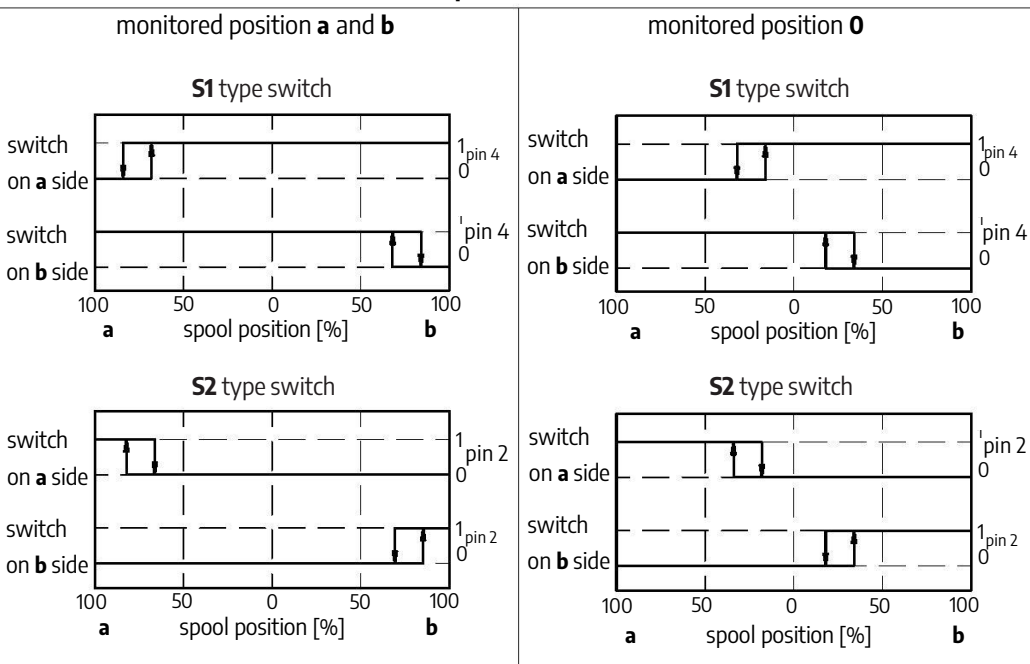

2-position versions WE6...A... (positions: **a**, **0**) solenoid and switch on a side

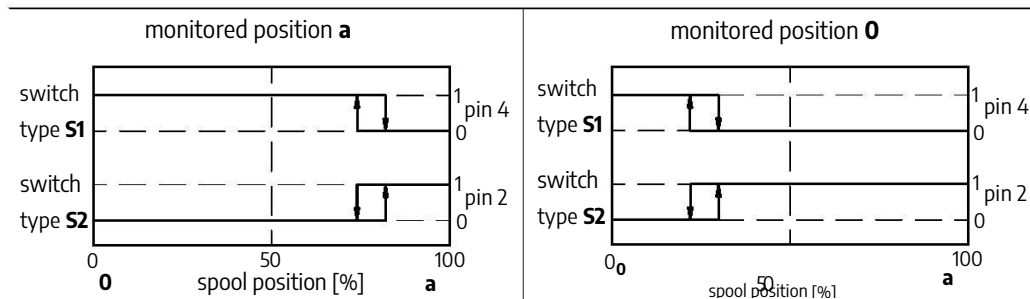

DIAGRAMS










Symbols for directional spool valves and initial positions of switches

Initial position of S type inductive switch depending on the spool position

0 - voltage free state of output contact

1 - voltage state of output contact


symbol for
directional valve

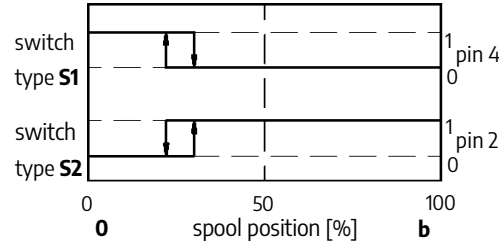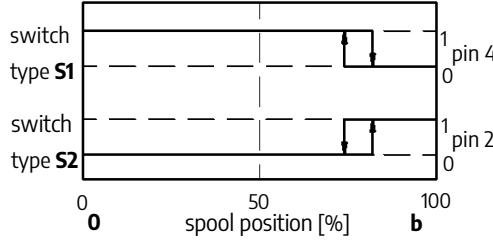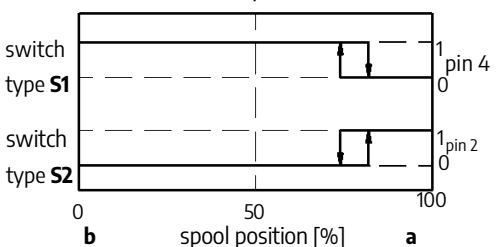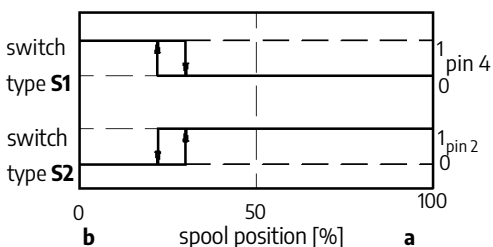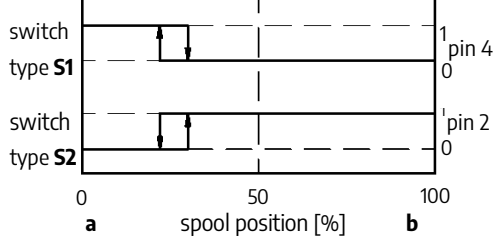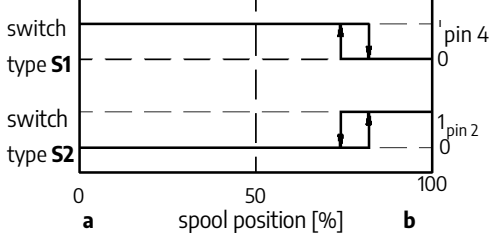2-position versions WE6...B... (positions: 0, b) solenoid and switch on b side		
monitored position 0	monitored position b	
		
2-position versions WE6A...; ...C...; ...D...; .../O...; .../OF... switch on a side		
monitored position a	monitored position b	
		
2-position versions WE6B...; ...Y... switch on b side		
monitored position a	monitored position b	
		


OVERALL AND CONNECTION DIMENSIONS

spool position switch S type


version with 2 solenoids and 2 switches

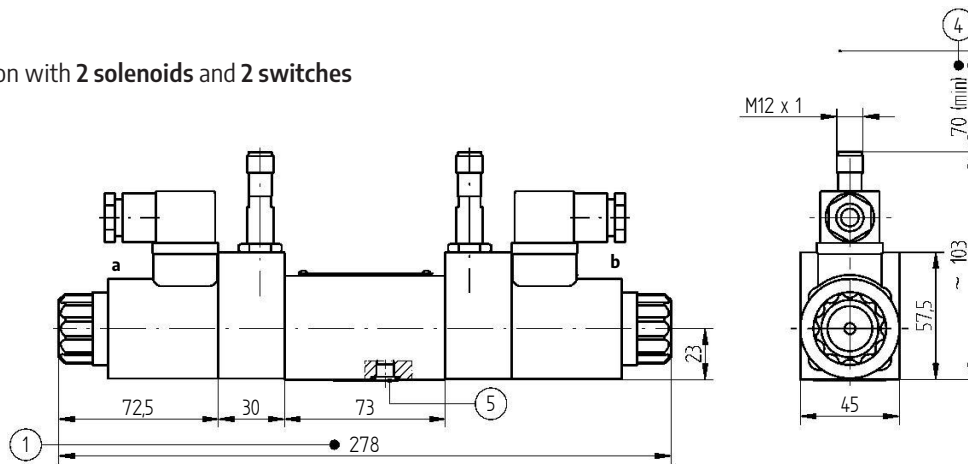

version with 1 solenoid and 1 switch

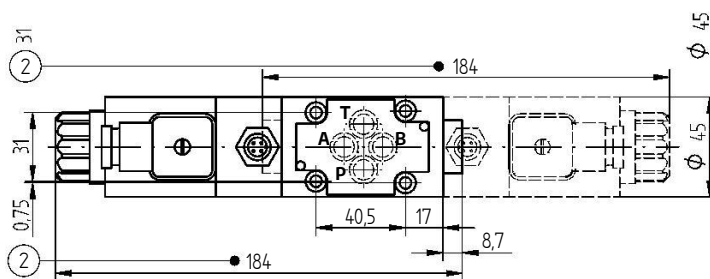

version with 2 solenoids and 1 switch

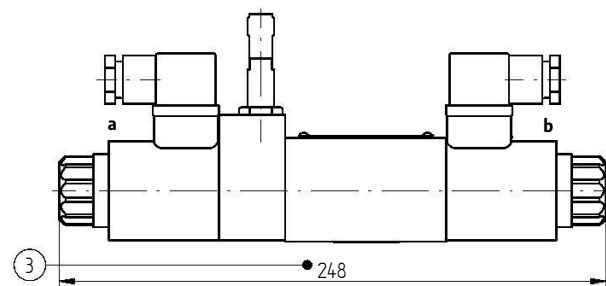

1. dimension of directional spool valve with 2 solenoids and 2 position switches:
 - 3-position, with spring return; versions **WE6.../...-S1...; S2...**
 - 2-position, without spring return; versions **WE6.../0...-S1...; S2...**
 - 2-position without spring return and with detent; versions **WE6.../0F...-S1...; S2...**
2. dimensions of directional spool valve with 1 solenoid and 1 position switch on a or b side 2-position with spring return
3. dimension of directional valve with 2 solenoids and 1 position switch:
 - 3-position, with spring return; versions **WE6.../...-S1...; S2...**
 - 2-position without spring return; versions **WE6.../0...-S1...; S2...**
 - 2-position without spring return, with detent; versions **WE6.../0F...-S1...; S2...**
4. dimension for connector and switch cables mounting (connectors not shown in the drawing must be ordered separately according to data sheet **WK 499 963**)
5. O-ring 9,25 × 1,78 - 4 pcs./set (P, T, A, B)


NOTES:

Directional spool valve with a spool position switch is factory pre-set; any adjustments to the valve can be made only by the Manufacturer. In case of a switch or a valve failure, the complete directional spool valve should be replaced.

ADDITIONAL EQUIPMENT OF THE DIRECTIONAL SPOOL VALVE

Spool position switch **M** type

version **WE6.../...-M...**

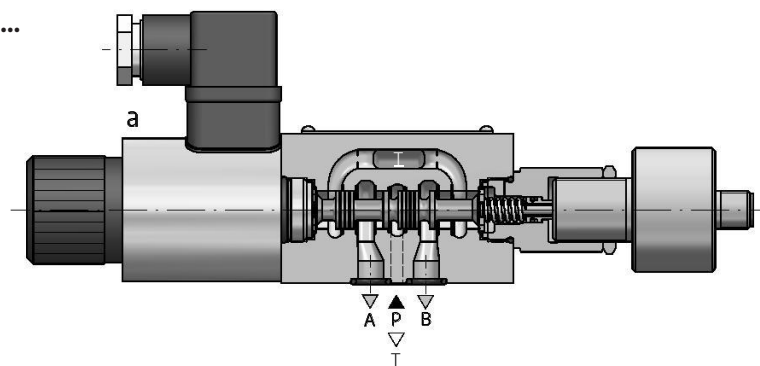


SUPPLEMENTARY TECHNICAL PARAMETERS

type of spool position switch	M type inductive switch with two alternative PNP outputs
supply voltage range of the switch	24 V DC $+20\%$ -10%
max load current of the switch	400 mA
switch connection type	M12 x 1 external thread; 4 pins
protection class	IP 65
weight of directional spool valve	1,8 kg


WARNING: M type inductive switches must not be connected in series.

DIAGRAMS

Diagrams of M type inductive switch electrical connection

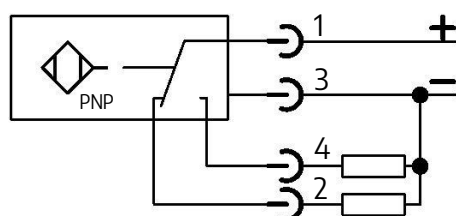

pin configuration



Symbols for directional spool valves and initial positions of switches




Initial position of M type inductive switch depending on the spool position

0 - voltage free state of output contact

1 - voltage state of output contact

symbol for
directional valve

2-position versions WE6...A... (positions: **a**, **0**) solenoid on a side and switch on b side

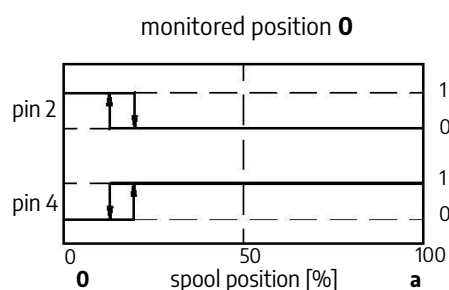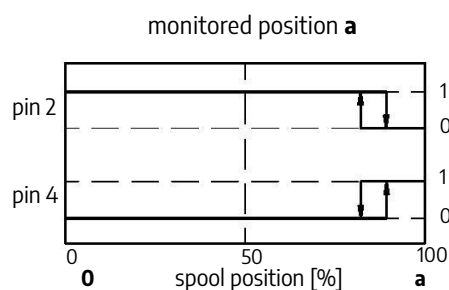

DIAGRAMS

Diagrams for directional spool valves and initial positions of switches




Initial position of M type inductive switch depending on the spool position

0 - voltage free state of output contact




1 - voltage state of output contact

symbol for
directional valve




2-position versions WE6...B... (positions: 0, b) solenoid on b side and switch on a side

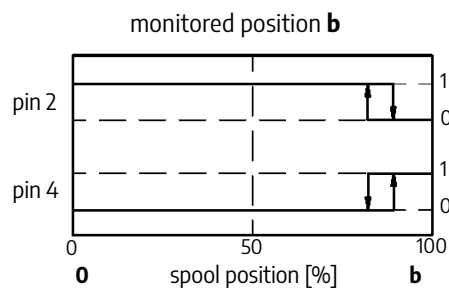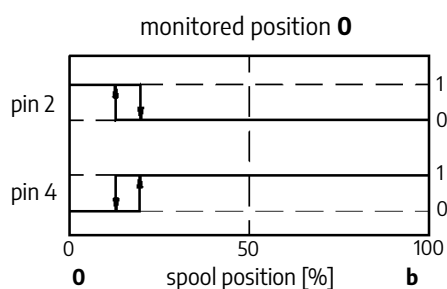

2-position versions WE6A...; ...C...; ...D...; ...D1... switch sensor on b side

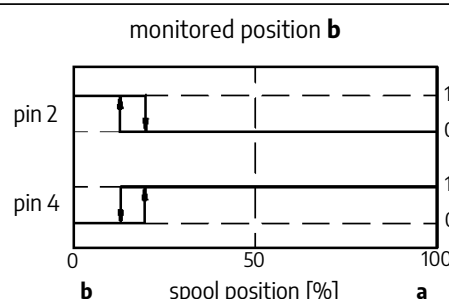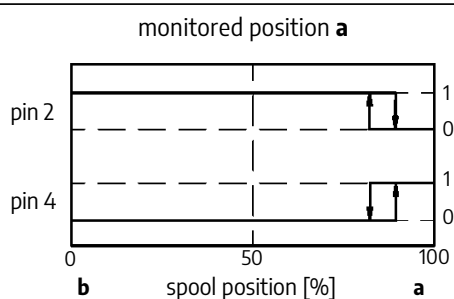

2-position versions WE6B...; ...Y...; ...Y1... switch on a side

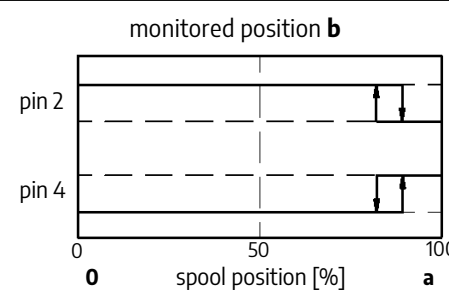
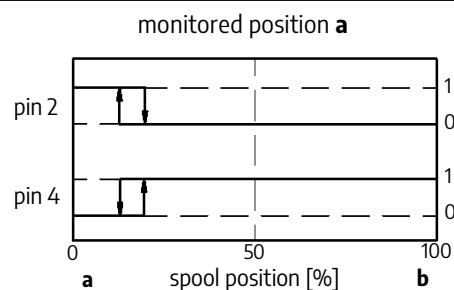


OVERALL AND CONNECTION DIMENSIONS


Spool position switch M type

(only for 2-position versions with spring return)

version with solenoid on **a** side and **M** type switch

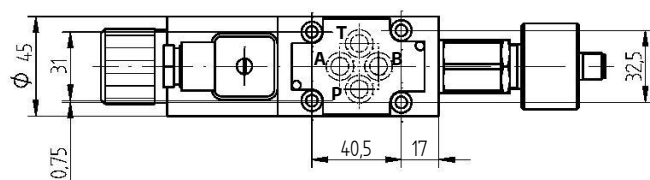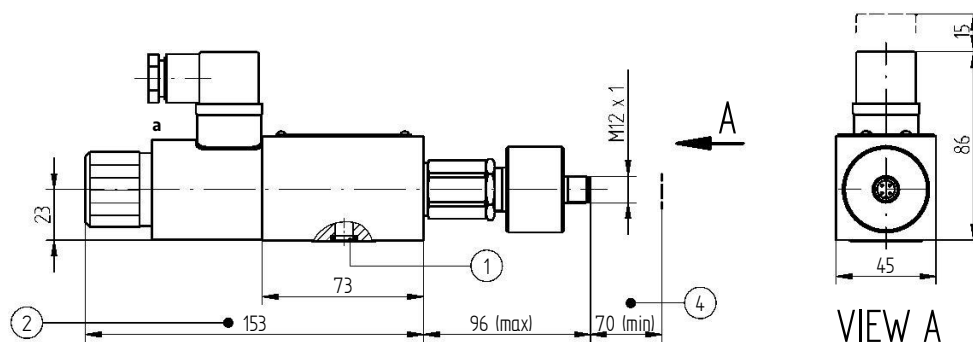

version with solenoid on **b** side and **M** type switch

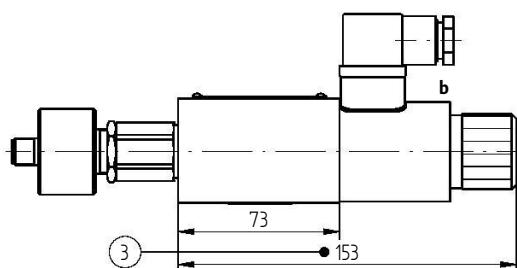

1. O-ring 9,25 × 1,78 - 4 pcs./set (P, T, A, B)
2. dimension of a 2-position directional spool valve, with a spring return; with 1 solenoid - on **a** side and **M** type switch (spool diagrams: A, C, D, D1, EA, FA, GA, HA, JA, LA, MA, PA, UA, WA)
3. dimension of a 2-position directional spool valve, with a spring return; with 1 solenoid - on **b** side and **M** type switch (spool diagrams: B, Y, Y1, EB, FB, GB, HB, JB, LB, MB, PB, UB, WB)
4. dimension for connector and switch cables mounting (connectors not shown in the drawing must be ordered separately according to data sheet WK 499 963)

NOTES:

Directional spool valve with a spool position switch is factory pre-set; any adjustments to the valve can be made only by the Manufacturer. In case of a switch or a valve failure, the complete directional spool valve should be replaced.



Euro
SERVICES

CONTACT

EURO SERVICES GROUP
www.Euroservicesgroup.com
Info@euroservicesgroup.com