

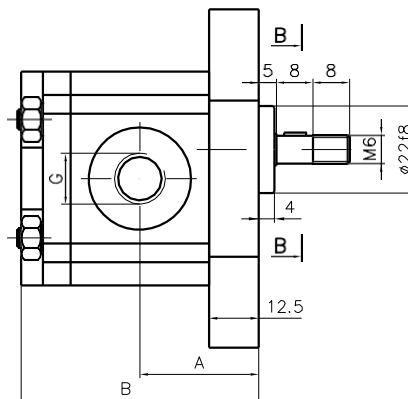
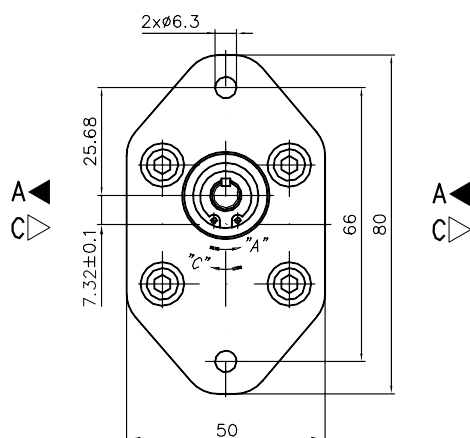





B - B




(Variant HV)



Type	Displacement	Flow		Pressure	max Speed	Dimension					
		at 1500 rpm	at max rpm			A	B	Inlet		Outlet	
	cm ³ /rev	l/min	l/min	P _{nom} bar	n rpm	mm	mm		G		G
00A(C)0,25X032	0,25	0,3	0,8	200	3500	27,6	55,3				
00A(C)0,3X032	0,3	0,4	0,9	200	3500	27,7	55,7				
00A(C)0,5X032	0,5	0,7	1,6	200	3500	28,7	57,5				
00A(C)0,75X032	0,75	1,0	2,3	200	3500	29,9	59,8				
00A(C)1X032	1	1,4	3,2	200	3500	31,0	62,0		1/4"		1/4"
00A(C)1,25X032	1,25	1,7	3,4	200	3000	32,1	64,2				
00A(C)1,5X032	1,5	2,1	3,5	175	2500	33,2	66,5				
00A(C)1,75X032	1,75	2,4	4,1	160	2500	34,3	68,7				
00A(C)2X032	2	2,8	3,7	160	2000	35,5	70,9				

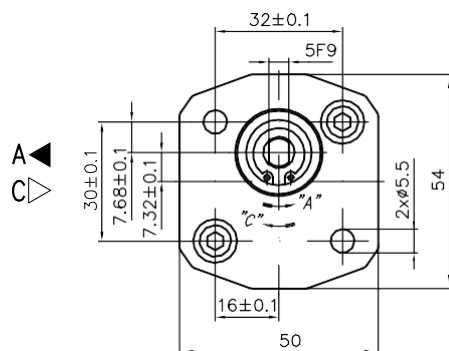

A
C



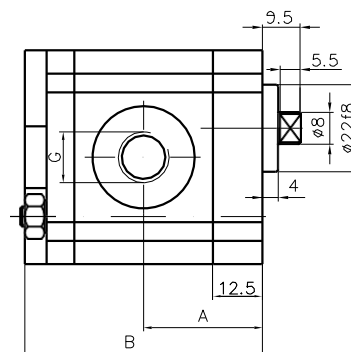


Type	Displacement	Flow		Pressure	max Speed	Dimension					
		at 1500 rpm	at max rpm			A	B	Inlet		Outlet	
	cm ³ /rev	l/min	l/min	P _{nom} bar	n rpm	mm	mm		G		G
00A(C)0,25X033...	0,25	0,3	0,8	200	3500	27,6	55,3				
00A(C)0,3X033...	0,3	0,4	0,9	200	3500	27,7	55,7				
00A(C)0,5X033...	0,5	0,7	1,6	200	3500	28,7	57,5				
00A(C)0,75X033...	0,75	1,0	2,3	200	3500	29,9	59,8				
00A(C)1X033...	1	1,4	3,2	200	3500	31,0	62,0		1/4"		1/4"
00A(C)1,25X033...	1,25	1,7	3,4	200	3000	32,1	64,2				
00A(C)1,5X033...	1,5	2,1	3,5	175	2500	33,2	66,5				
00A(C)1,75X033...	1,75	2,4	4,1	160	2500	34,3	68,7				
00A(C)2X033...	2	2,8	3,7	160	2000	35,5	70,9				


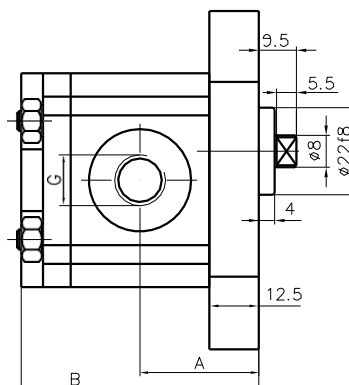
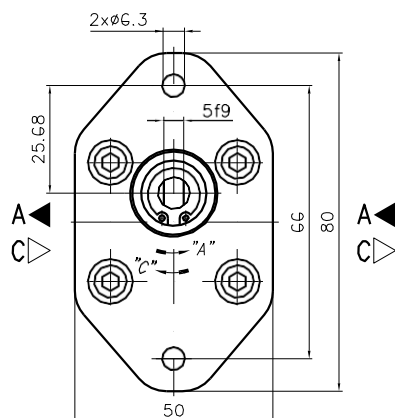


Type	Displacement	Flow		Pressure P _{nom}	max Speed n	Dimension					
		at 1500 rpm	at max rpm			A	B	Inlet		Outlet	
	cm ³ /rev	l/min	l/min	bar	rpm	mm	mm		G		G
00A(C)0,25X043	0,25	0,3	0,8	200	3500	27,6	55,3				
00A(C)0,3X043	0,3	0,4	0,9	200	3500	27,7	55,7				
00A(C)0,5X043	0,5	0,7	1,6	200	3500	28,7	57,5				
00A(C)0,75X043	0,75	1,0	2,3	200	3500	29,9	59,8				
00A(C)1X043	1	1,4	3,2	200	3500	31,0	62,0		1/4"		1/4"
00A(C)1,25X043	1,25	1,7	3,4	200	3000	32,1	64,2				
00A(C)1,5X043	1,5	2,1	3,5	175	2500	33,2	66,5				
00A(C)1,75X043	1,75	2,4	4,1	160	2500	34,3	68,7				
00A(C)2X043	2	2,8	3,7	160	2000	35,5	70,9				

Rotation "A"

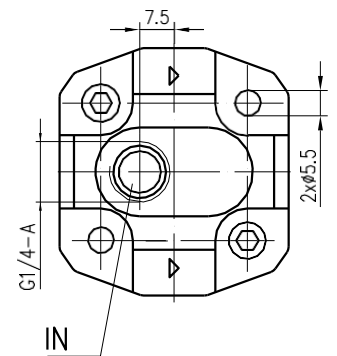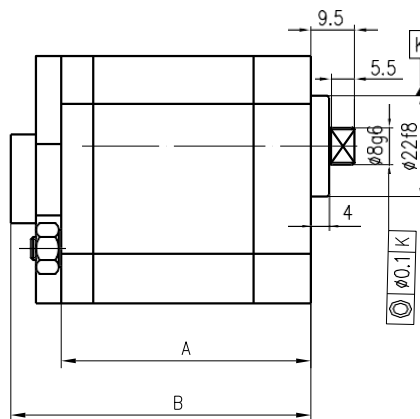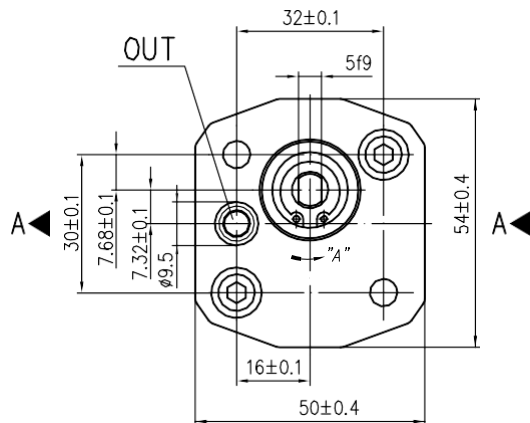

Rotation "C"

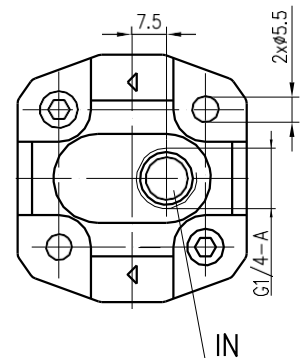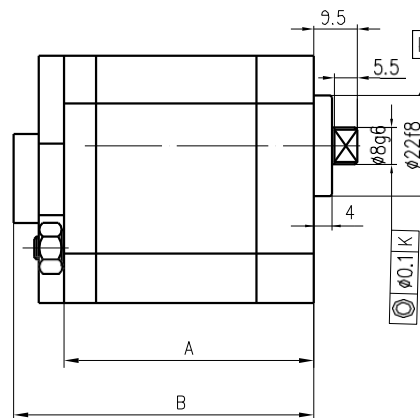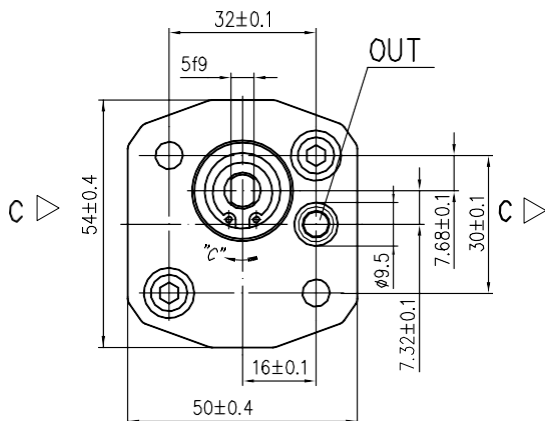

Type	Displacement	Flow		Pressure	max Speed	Dimension					
		at 1500 rpm	at max rpm			A	B	Inlet		Outlet	
	cm ³ /rev	l/min	l/min	P _{nom} bar	n rpm	mm	mm		G		
00A(C)0,25X047	0,25	0,3	0,8	200	3500	55,3	60,8		1/4'		Ø5,5
00A(C)0,3X047	0,3	0,4	0,9	200	3500	55,7	61,2				
00A(C)0,5X047	0,5	0,7	1,6	200	3500	57,5	63,0				
00A(C)0,75X047	0,75	1,0	2,3	200	3500	59,8	65,3				
00A(C)1X047	1	1,4	3,2	200	3500	62,0	67,5				
00A(C)1,25X047	1,25	1,7	3,4	200	3000	64,2	69,7				
00A(C)1,5X047	1,5	2,1	3,5	175	2500	66,5	72,0				
00A(C)1,75X047	1,75	2,4	4,1	160	2500	68,7	74,2				
00A(C)2X047	2	2,8	3,7	160	2000	70,9	76,4				

Type	Displacement	Flow		Pressure P _{nom}	max Speed n	Dimension							
		at 1500 rpm	at max rpm			A	B	Inlet			Outlet		
	cm³/rev	l/min	l/min	bar	rpm	mm	mm			G			G
00A(C)0,25X063	0,25	0,3	0,8	200	3500	27,6	55,3			1/4"		ø5,5	
00A(C)0,3X063	0,3	0,4	0,9	200	3500	27,7	55,7						
00A(C)0,5X063	0,5	0,7	1,6	200	3500	28,7	57,5						
00A(C)0,75X063	0,75	1,0	2,3	200	3500	29,9	59,8						
00A(C)1X063	1	1,4	3,2	200	3500	31,0	62,0						
00A(C)1,25X063	1,25	1,7	3,4	200	3000	32,1	64,2						
00A(C)1,5X063	1,5	2,1	3,5	175	2500	33,2	66,5						
00A(C)1,75X063	1,75	2,4	4,1	160	2500	34,3	68,7						
00A(C)2X063	2	2,8	3,7	160	2000	35,5	70,9						